



Feature

- Width only 35mm (2SU)
- 4:1 ultrawide input range
- -40~+85°C wide working temperature
- No minimum load required
- DC output adjustable ($\pm 10\%$)
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- Protections: Short circuit / Overload / Over voltage / Input reverse polarity / Input under voltage protection
- 3KVdc I/O isolation(Reinforced isolation)
- 3 years warranty

Applications

- Industrial control system
- Semi-conductor fabrication equipment
- Factory automation
- Electro-mechanical
- Wireless network
- Telecom or datacom system

Description

DDR-30 series is a 30W DIN Rail type DC-DC converter with main features including DIN rail-type easy installation, ultra slim width (35mm), 4:1 wide input voltage, -40~+85°C wide operating temperature, 3KVdc I/O isolation, adjustable output voltage ($\pm 10\%$) and full protective functions...etc.

This series has two input options: 9~36V / 18~75V and various output options: 5V / 12V / 15V / 24V and can be used for industrial control, security control, communication system and other fields. Suitable applications are DC buck/boost regulator, increasing system insulation level and voltage drop compensation along cable...etc.

Model Encoding

DDR - 30 G - 24


- Output voltage(5/12/15/24Vdc)
- Input voltage (G: 9~36Vdc, L: 18~75Vdc)
- Rated wattage
- Series name




SPECIFICATION

MODEL		DDR-30G-5	DDR-30G-12	DDR-30G-15	DDR-30G-24	DDR-30L-5	DDR-30L-12	DDR-30L-15	DDR-30L-24
OUTPUT	DC VOLTAGE	5V	12V	15V	24V	5V	12V	15V	24V
	RATED CURRENT	6A	2.5A	2A	1.25A	6A	2.5A	2A	1.25A
	CURRENT RANGE	0 ~ 6A	0 ~ 2.5A	0 ~ 2A	0 ~ 1.25A	0 ~ 6A	0 ~ 2.5A	0 ~ 2A	0 ~ 1.25A
	RATED POWER	30W	30W	30W	30W	30W	30W	30W	30W
	RIPPLE & NOISE (max.) Note.2	60mVp-p	75mVp-p	75mVp-p	100mVp-p	60mVp-p	75mVp-p	75mVp-p	100mVp-p
	VOLTAGE ADJ. RANGE	4.5 ~ 5.5V	9 ~ 13.2V	13.5 ~ 16.5V	21.6 ~ 28V	4.5 ~ 5.5V	9 ~ 13.2V	13.5 ~ 16.5V	21.6 ~ 28V
	VOLTAGE TOLERANCE Note.3	±2.0%	±2.0%	±2.0%	±2.0%	±2.0%	±2.0%	±2.0%	±2.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±1.5%	±0.5%	±0.5%	±0.5%	±1.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME	120ms, 85ms at full load							
HOLD UP TIME (Typ.)	4ms@12Vdc, 8ms@24Vdc, 16ms@48Vdc								
INPUT	EXTERNAL CAPACITANCE LOAD (Max.)	3300 μF	2200 μF	1500 μF	1000 μF	3300 μF	2200 μF	1500 μF	1000 μF
	VOLTAGE RANGE Note.4	9 ~ 36Vdc				18 ~ 75Vdc			
	EFFICIENCY (Typ.)	85%	86%	87%	89%	86%	89%	90%	91%
	DC CURRENT (Typ.)	1.5A /24Vdc				0.8A /48Vdc			
	INRUSH CURRENT (Typ.)	15A /24Vdc				15A /48Vdc			
PROTECTION	OVERLOAD	110 ~ 150% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed							
	OVER VOLTAGE	5.75 ~ 7V	13.8 ~ 16.2V	17.25 ~ 20.25V	28.8 ~ 34V	5.75 ~ 7V	13.8 ~ 16.2V	17.25 ~ 20.25V	28.8 ~ 34V
		Protection type : Shut down o/p voltage, re-power on to recover							
	REVERSE POLARITY	By internal MOSFET, no damage, recovers automatically after fault condition removed							
	UNDER VOLTAGE LOCKOUT	24V (G-type):Power On≥9V , Off≤8.5V 48V (L-type):Power On≥18V , Off≤17V							
ENVIRONMENT	WORKING TEMP.	-40 ~ +85℃ (Refer to "Derating Curve")							
	WORKING HUMIDITY	5 ~ 95% RH non-condensing							
	STORAGE TEMP., HUMIDITY	-40 ~ +85℃, 5 ~ 95% RH non-condensing							
	TEMP. COEFFICIENT	±0.03%/℃ (0 ~ 60℃)							
	VIBRATION	Component:10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6							
SAFETY & EMC (Note 5)	SAFETY STANDARDS	IEC 62368 (LVD) approved, Design refer to EN61558-2-16 / UL508							
	WITHSTAND VOLTAGE	I/P-O/P:3KVdc							
	ISOLATION RESISTANCE	I/P-O/P>100M Ohms / 500Vdc / 25℃ / 70% RH							
	EMC EMISSION	Parameter			Standard		Test Level / Note		
		Conducted			EN55032		Class B		
		Radiated			EN55032		Class B		
		Voltage Flicker			EN61000-3-3		-----		
	EMC IMMUNITY	EN55024 , EN61000-6-2(EN50082-2), EN61204-3							
		Parameter			Standard		Test Level / Note		
		ESD			EN61000-4-2		Level 3, 8KV air ; Level 3, 6KV contact; criteria A		
		Radiated			EN61000-4-3		Level 3, 10V/m ; criteria A		
		EFT / Burst			EN61000-4-4		Level 3, 2KV ; criteria A		
		Surge			EN61000-4-5		Level 3, 1KV/Line-Line ; criteria A		
		Conducted			EN61000-4-6		Level 3, 10V ; criteria A		
		Magnetic Field			EN61000-4-8		Level 4, 30A/m ; criteria A		
OTHERS		MTBF	483.3K hrs min. MIL-HDBK-217F (25℃)						
	DIMENSION	35*90*54.5mm (W*H*D)							
	PACKING	0.12Kg;96pcs/12.5Kg/1.04CUFT							
NOTE	1. All parameters NOT specially mentioned are measured at normal input (G:24Vdc, L:48Vdc), rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Derating may be needed under low input voltage. Please check the derating curve for more details. 5. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)								


Block Diagram

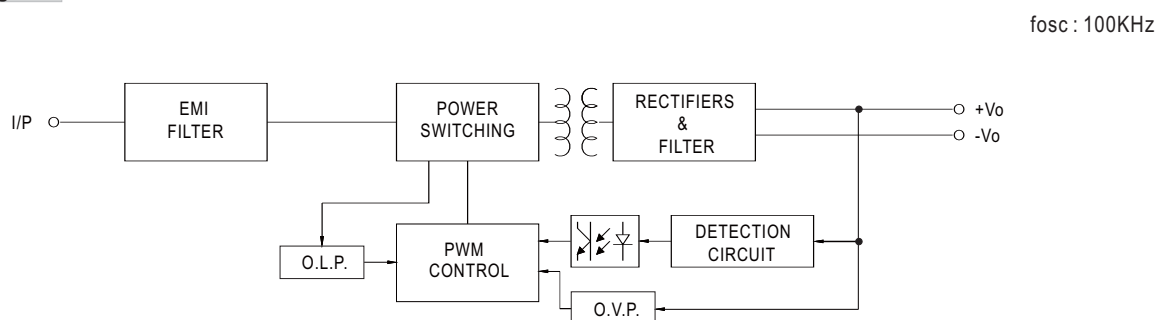

Derating Curve


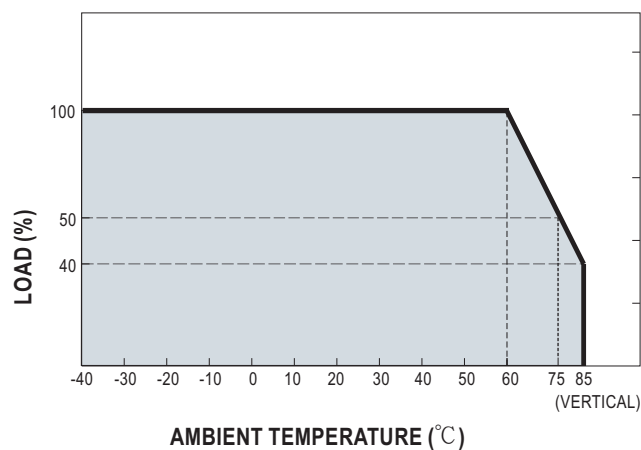


Output derating VS input voltage

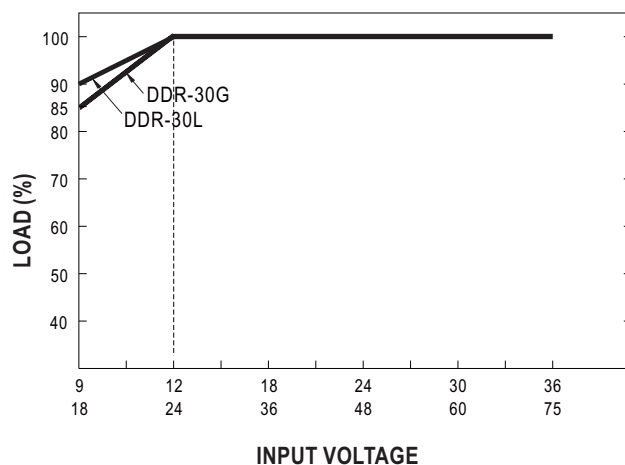

Mechanical Specification

(Unit: mm , tolerance $\pm 0.5\text{mm}$)

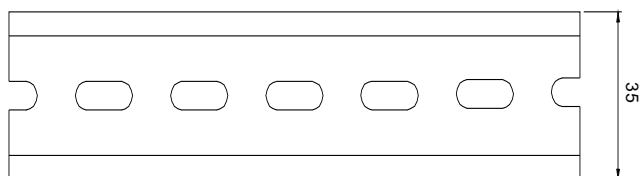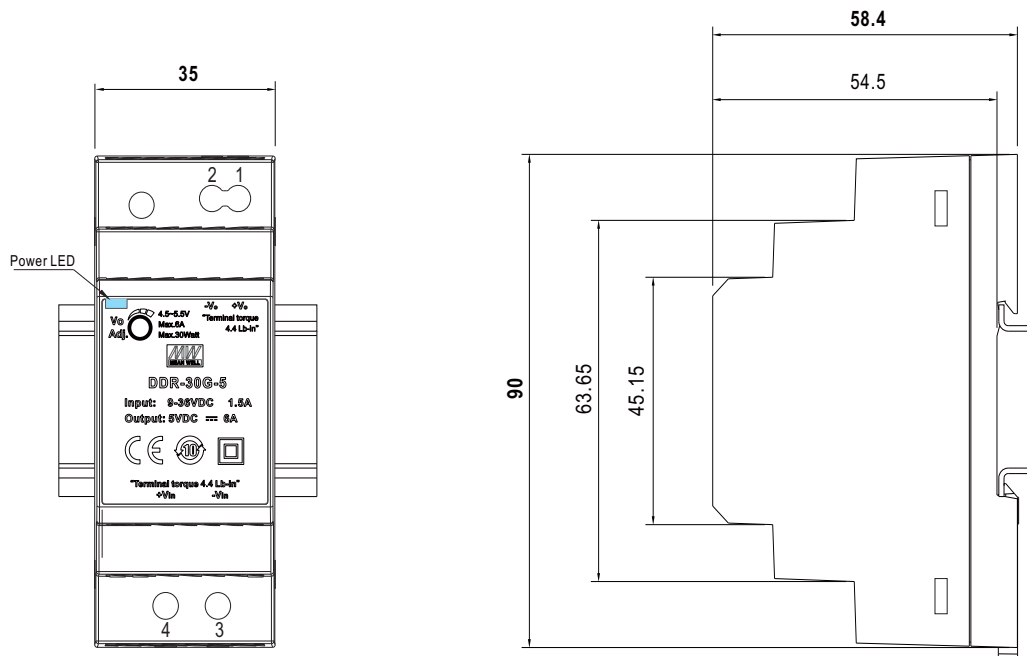

ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15

Terminal Pin No. Assignment

Pin No.	Assignment
1	DC Output +Vo
2	DC Output -Vo
3	DC Input -Vin
4	DC Input +Vin

Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>